


# CONICAL PAIL Ø286mm

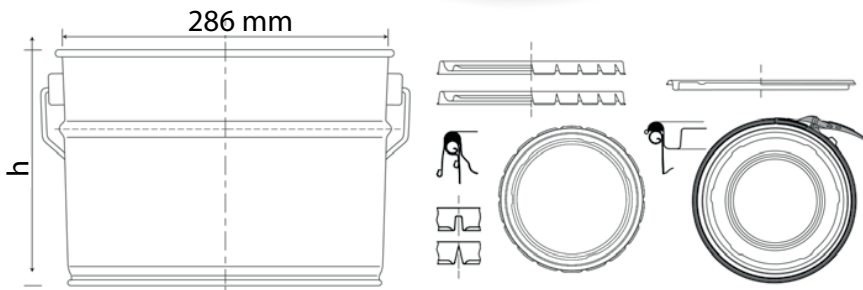

Designation	Quantity of rows on pallet	Quantity per pallet (1 200*1 000 mm), pcs	Quantity per pallet (1 200*800 mm), pcs	Height of pallet, mm
Ø 286 mm 10 litre height 204 mm	25	300	275	2094 ± 20
Ø 286 mm 12 litre height 238 mm	25	300	275	2128 ± 20
Ø 286 mm 15 litre height 288 mm	25	300	275	2178 ± 20
Ø 286 mm 18 litre height 333 mm	24	288	264	2151 ± 20
Ø 286 mm 20 litre height 370 mm	24	288	264	2188 ± 20
Ø 286 mm 23 litre height 413 mm	24	288	264	2228 ± 20
Ø 286 mm 25 litre height 453 mm	23	276	253	2198 ± 20
Ø 286 mm 26 litre height 465 mm	23	276	253	2210 ± 20

## APPLICATION

Storage and transportation of paint, lubricants, construction materials, various chemical and petrochemical products.

- Protective coating of the seam and welding points of the “ears”
- Full protective coating, resistant to corrosion processes

## EXTERNAL COATING

- Plain
- Enamel
- Lithography

## GENERAL SPECIFICATIONS

- Triple bottom seaming
- Longitudinal weld seam – Superwima
- Stiffening rib
- Seven-point welding of “ears”
- The elongated shape of “ears” eliminates the possibility of punching body with a metal handle.

## CLOSURE TYPES

- Lug lid, U
- Lug lid, V
- Lug lid, with place for plastic insert, pull spout (Ø 42,3 and Ø 57)
- Ring latch lid (overlapping; ring T-30, T-38)

## TYPES OF LID SEALS

- Single- component PVC sealant
- Two- component, porous

## INTERNAL COATING

- Plain

## TYPES OF HANDLES

- Metal